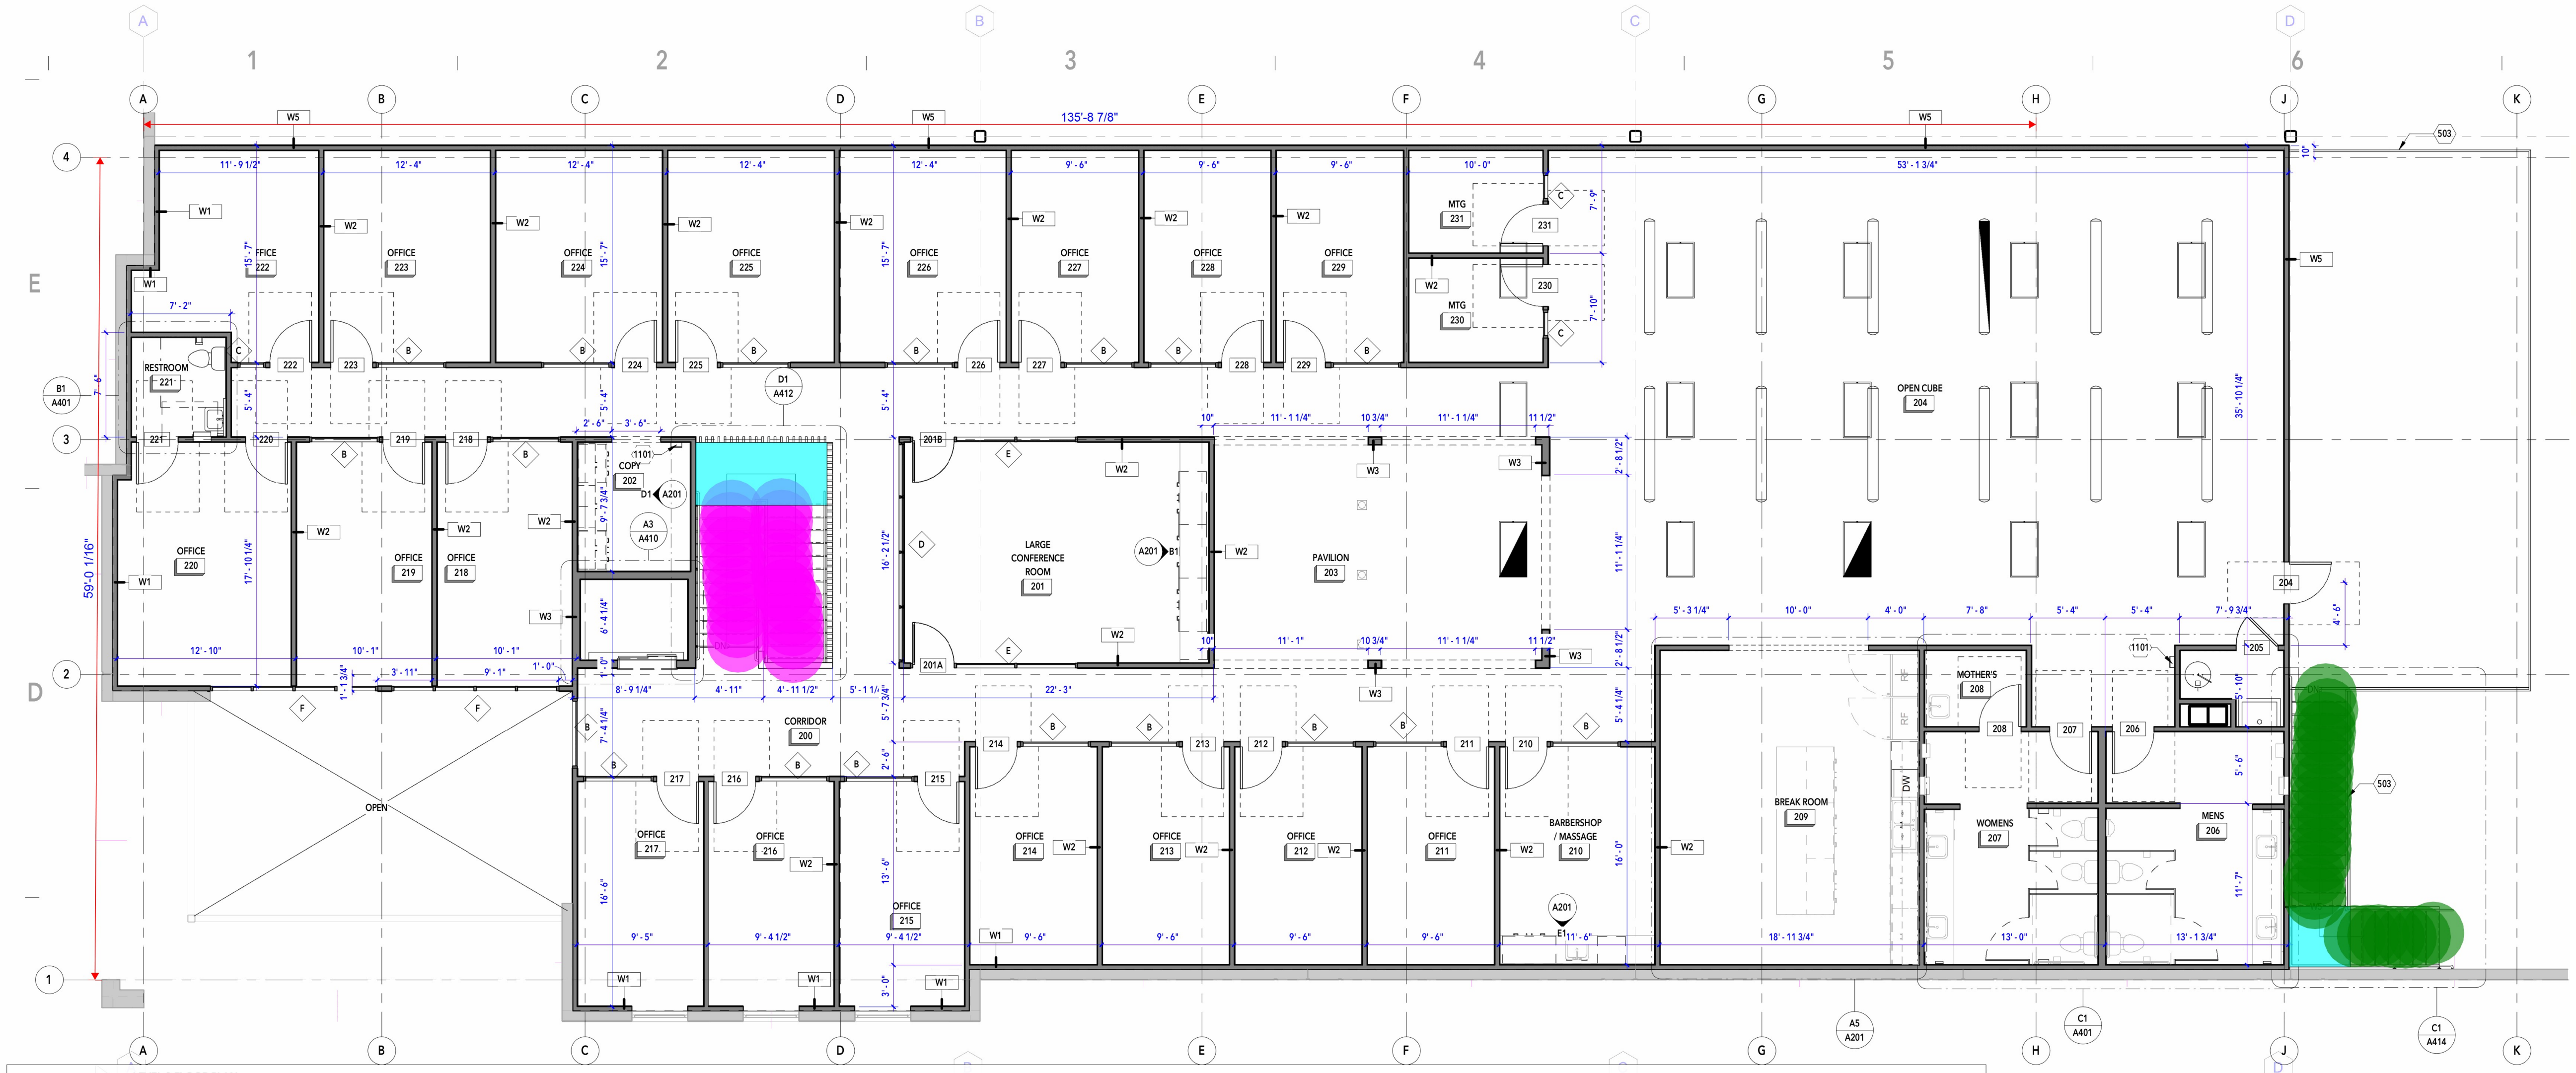

(4'6"lx1'wx2"t) precast concrete stair step with nosing	24.0 EA	
2" thick precast concrete @ stair landing	61.8 SQ FT	
(4'4"lx1'wx2"t) precast concrete stair step with nosing	24.0 EA	

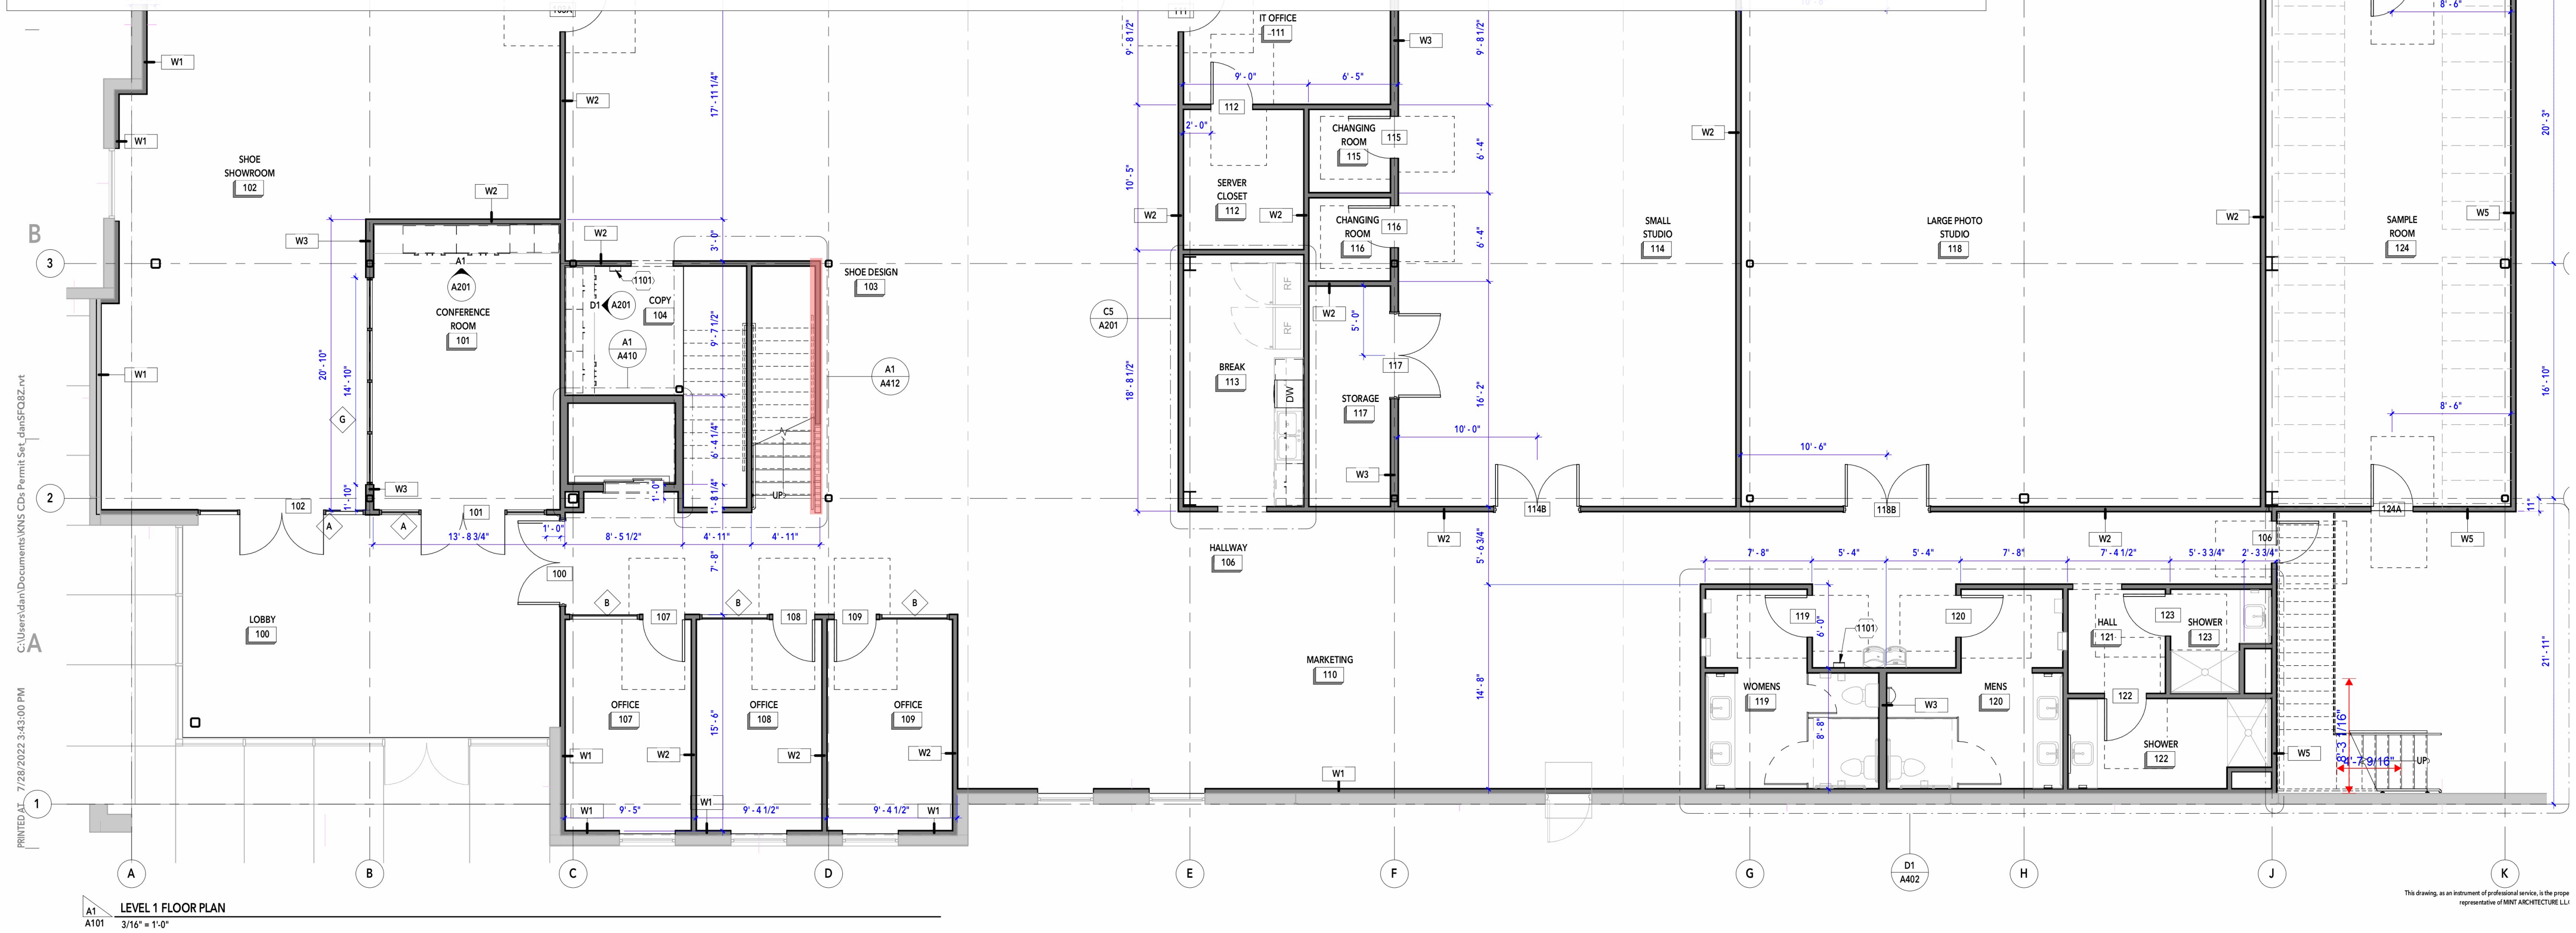

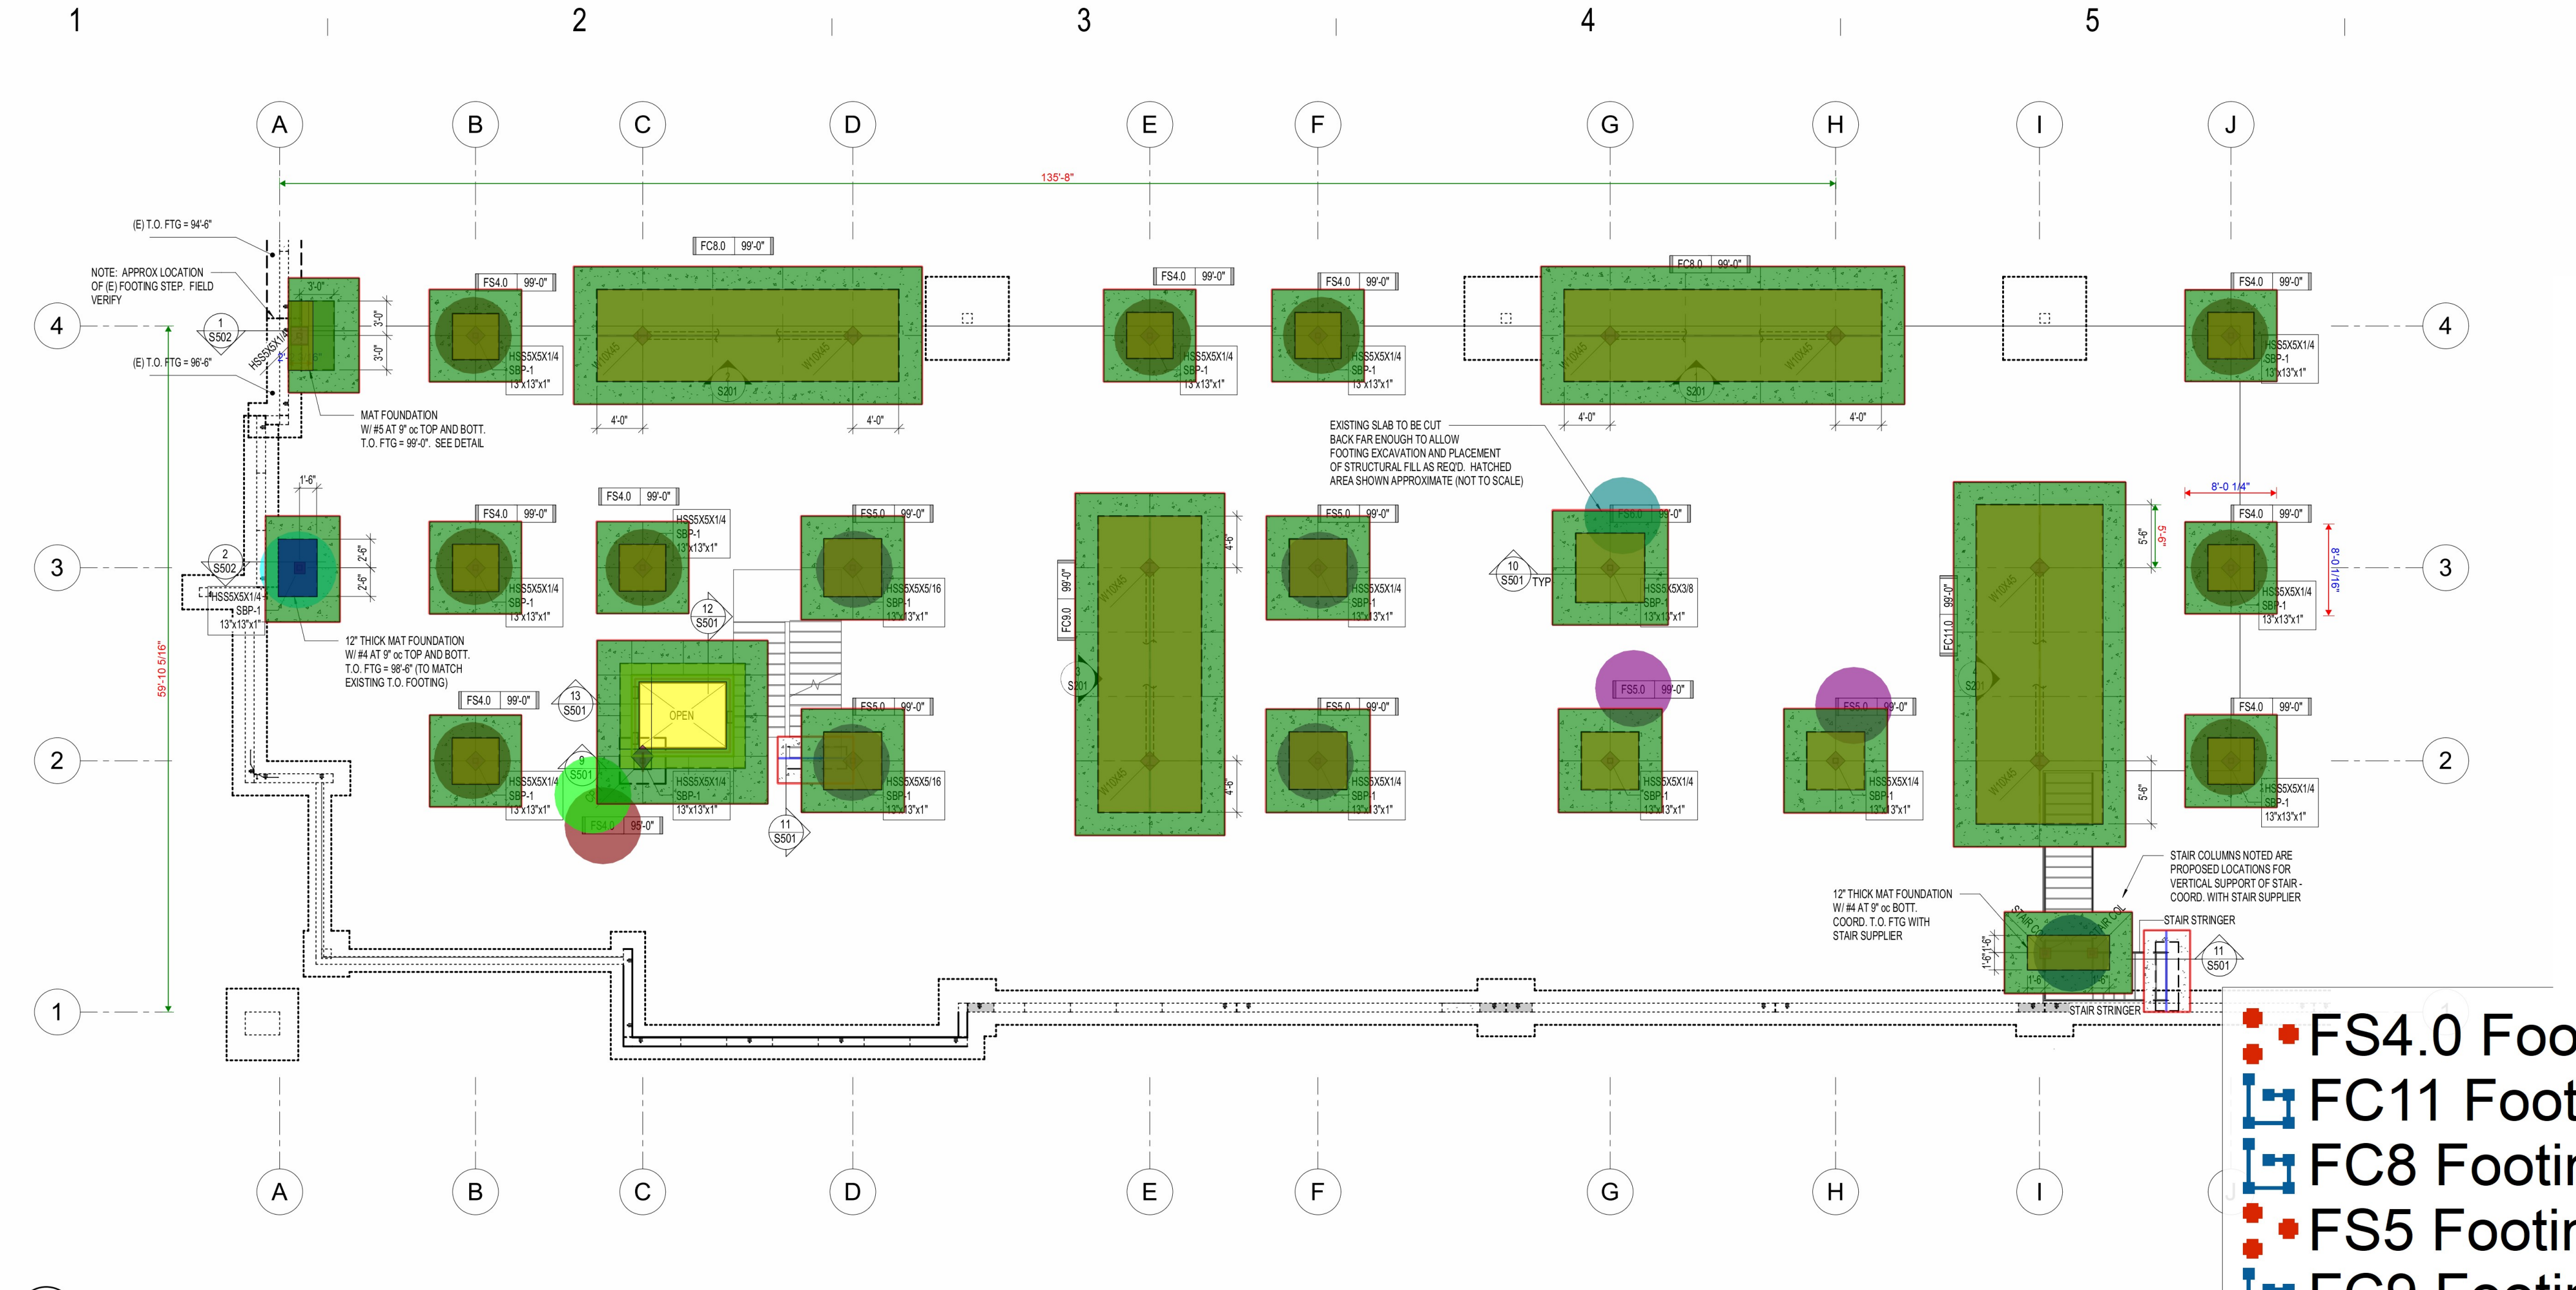

1 FOOTING AND FOUNDATION PLAN - MEZZANINE
S101 NO SCALE

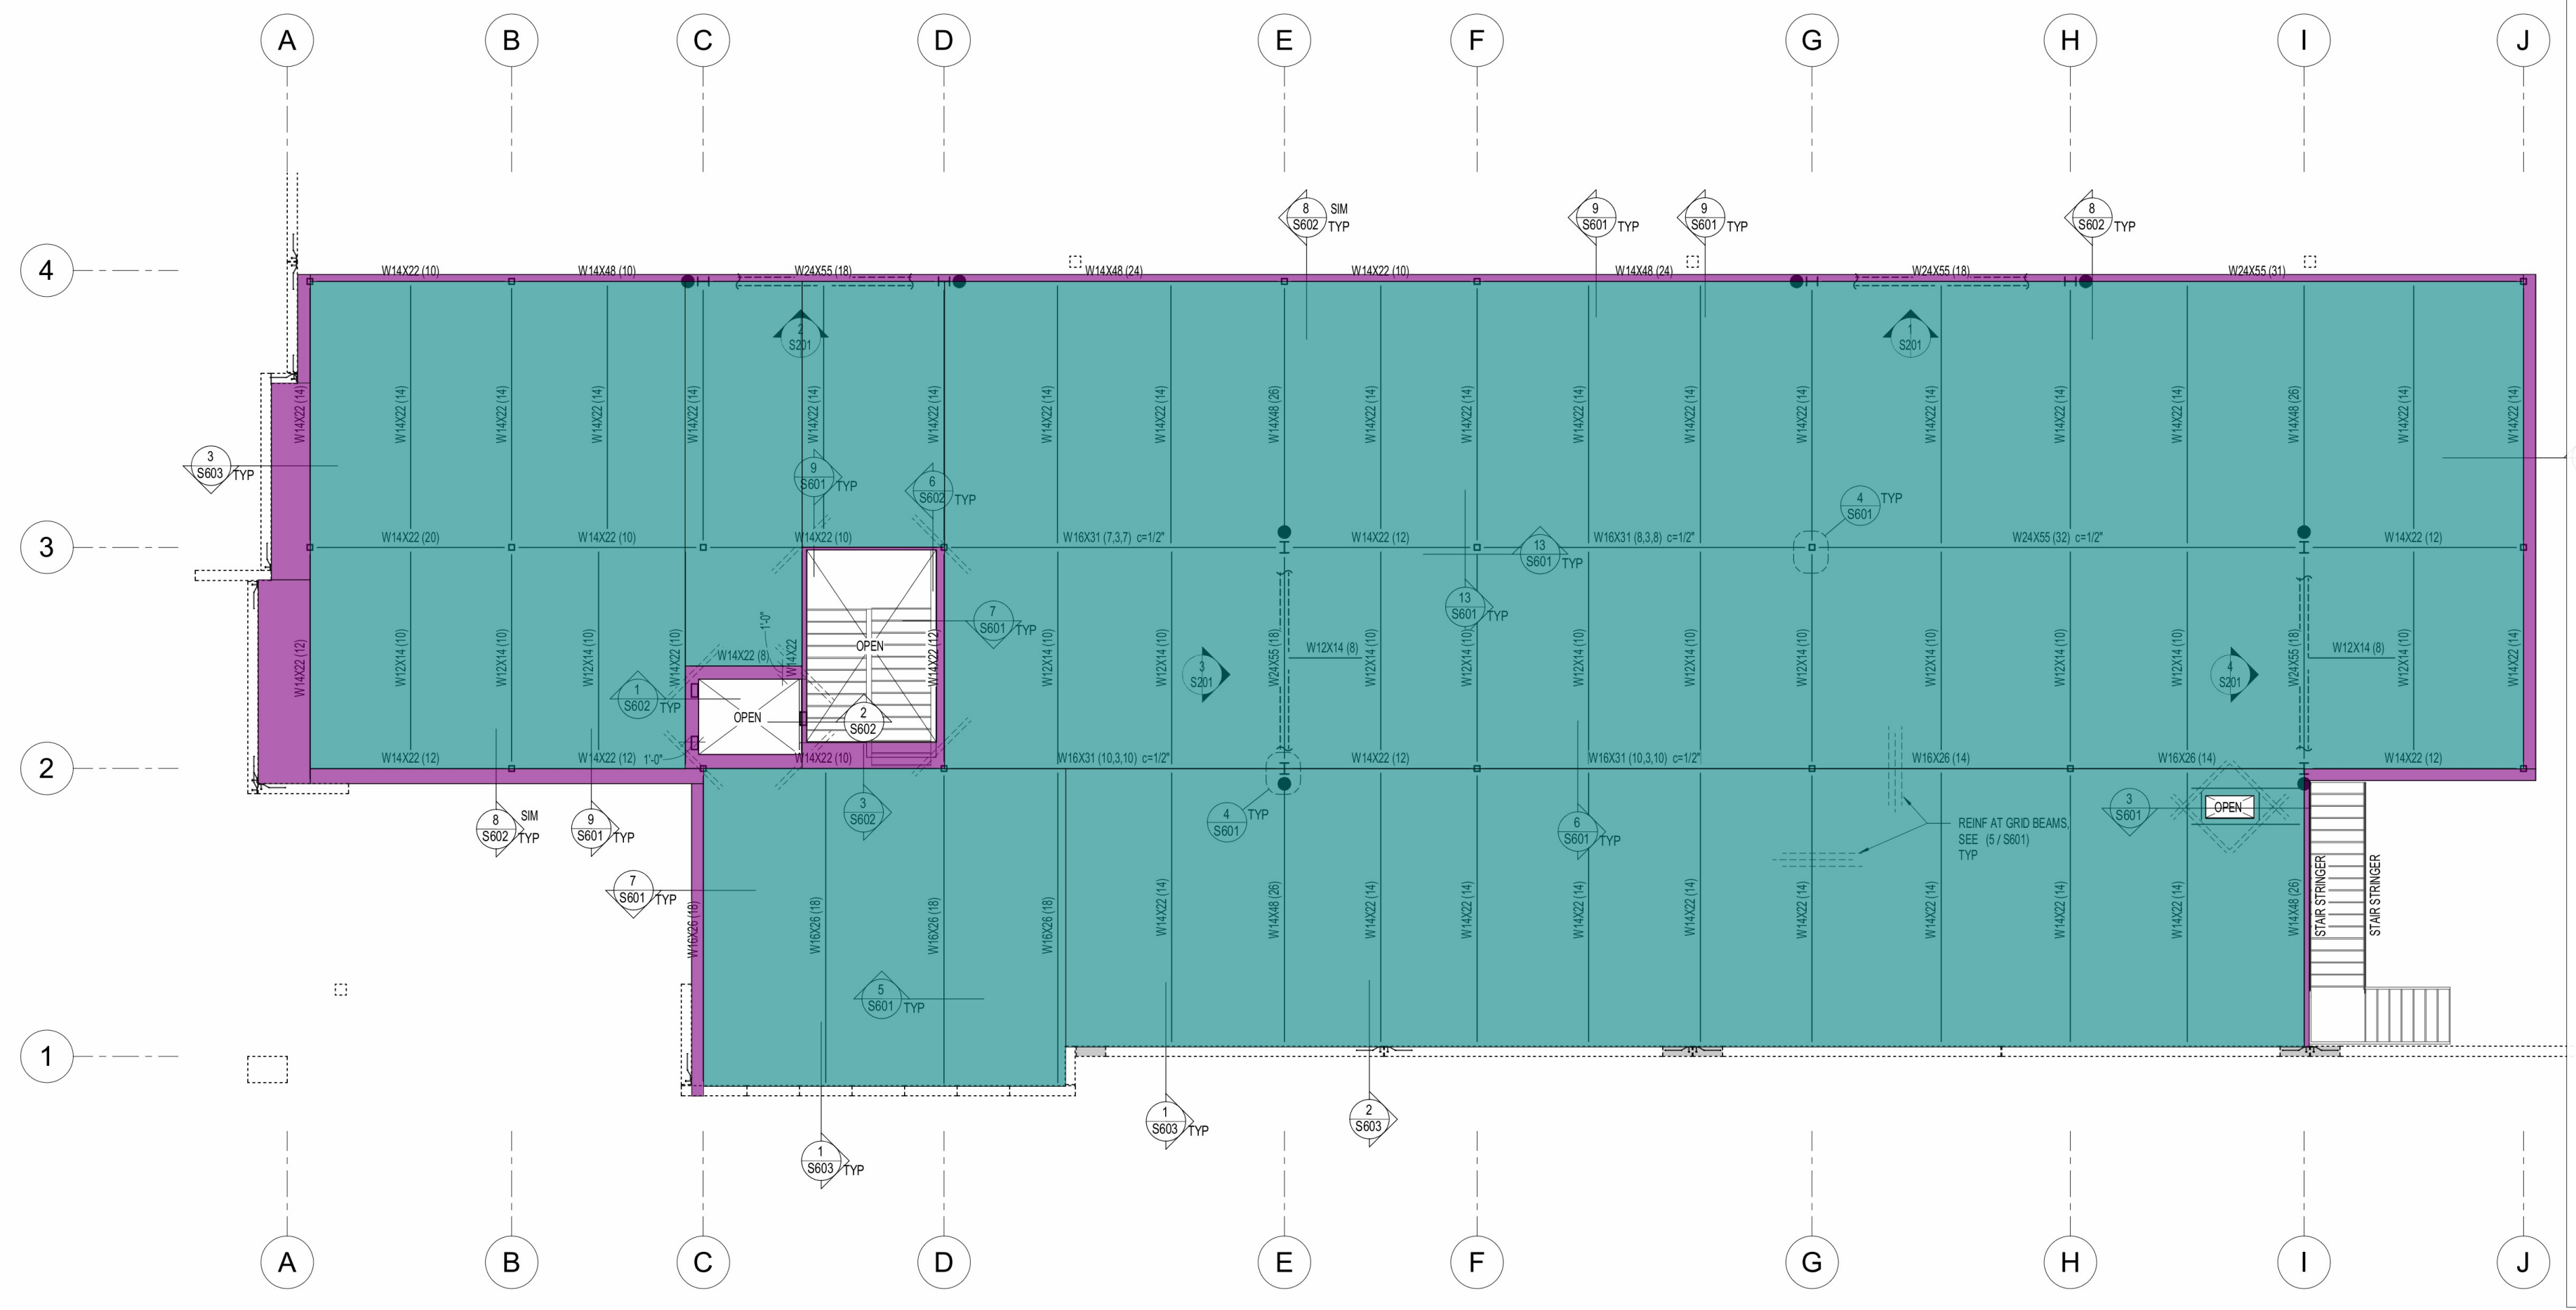

2 FLOOR FRAMING PLAN - MEZZANINE
S101 NO SCALE

FS4.0 Footing	10.0 EA	
FC11 Footing	27.9 FT	
FC8 Footing	54.0 FT	
FS5 Footing	6.0 EA	
FC9 Footing	25.9 FT	
8" concrete foundation walls @ perimet...	29.3 FT	
CP-1	1.0 EA	
12" thick concrete slab reinforced w...	100.7 SQ FT	
11/S501	13.3 FT	
(5'Lx3'4"wx1't) mat foundation reinforce...	1.0 EA	
2'6" thick reinforced mat	5.6 SQ FT	
3'6" thick reinforced mat	16.4 SQ FT	
(7'2"lx3'wx1't) mat foundation w/ #4 @ 9...	1.0 EA	
2" thick non shrinkage grout @ colu...	42.1 SQ FT	
FS 6 Footing	1.0 EA	
Joint @ new/old concrete slab on gra...	1099.2 FT	
Thickened concrete, 0.31 SF	31.7 FT	
Thickened concrete, 1.06 SF	1.7 FT	
6" Thick reinforced slab on grade	3147.6 SQ FT	
Thickened concrete, 0.5' thick	1348.2 SQ FT	
Thickened concrete, 01' thick	17.1 SQ FT	
6" thick 3,500 psi light weight concr...	384.1 SQ FT	
4.5" thick (avg thickness is taken) ...	8656.7 SQ FT	

1 2 3 4 5 6 7

E

CONCRETE FOOTING SCHEDULE

MARK	WIDTH	LENGTH	DEPTH	REINFORCING CROSSWISE				REINFORCING LENGTHWISE				COMMENTS
				NO	SIZE	LENGTH	SPACING	NO	SIZE	LENGTH	SPACING	
FC8.0	8'-0"	CONT	21"	—	#6	7'-6"	10" oc	(9)	#6	CONT	EQ	TOP
				—	#6	7'-6"	10" oc	(9)	#6	CONT	EQ	BOTTOM
FC9.0	9'-0"	CONT	21"	—	#6	8'-6"	10" oc	(10)	#6	CONT	EQ	TOP
				—	#6	8'-6"	10" oc	(10)	#6	CONT	EQ	BOTTOM
FC11.0	11'-0"	CONT	24"	—	#6	10'-6"	10" oc	(13)	#6	CONT	EQ	TOP
				—	#6	10'-6"	10" oc	(13)	#6	CONT	EQ	BOTTOM
FS3.0	3' - 0"	3 '-0"	12"	3	#5	2' - 6"	EQ	3	#5	2' - 6"	EQ	
FS4.0	4' - 0"	4 '-0"	12"	4	#5	3' - 6"	EQ	4	#5	3' - 6"	EQ	
FS5.0	5' - 0"	5 '-0"	12"	5	#5	4' - 6"	EQ	5	#5	4' - 6"	EQ	
FS6.0	6' - 0"	6 '-0"	14"	6	#5	5' - 6"	EQ	6	#5	5' - 6"	EQ	

C3000-S2500



TYPICAL FOOTING SECTION

CONCRETE FOOTING NOTES:

1. PLACE ALL FOOTING REINFORCING IN BOTTOM OF FOOTING WITH 3" CLEAR CONCRETE COVER, UNLESS NOTED OTHERWISE.
2. TOP REINFORCING, WHERE SPECIFIED, SHALL BE PLACED IN THE TOP OF THE FOOTING WITH 2" MINIMUM CONCRETE COVER.
3. IF FOOTINGS ARE EARTH FORMED, FOOTING WIDTH AND LENGTH SHALL BE 6" WIDER AND LONGER THAN SCHEDULED.
4. SEE GENERAL STRUCTURAL NOTES FOR ALL OTHER REQUIREMENTS.
5. NOT ALL FOOTINGS ARE USED, SEE FOUNDATION PLAN FOR FOOTING MARKS.
6. RUN CONTINUOUS BARS IN 'FC' FOOTING THROUGH INTERSECTED 'FS' FOOTINGS.
7. EXTEND CONTINUOUS FOOTINGS 1'-0" BEYOND END OF WALL, EXCEPT AT INTERSECTING CORNERS OR UNO ON PLAN.
8. FOOTINGS MAY BE THICKER THAN THE SCHEDULED DEPTH IN AREAS SURROUNDING ANCHOR BOLTS OR HOLD DOWNS, SEE ANCHORAGE AND HOLD DOWN DETAILS.
9. IN FC FOOTINGS CROSSWISE BAR SHALL BE BELOW THE LENGTHWISE BAR

1 CONCRETE FOOTING SCHEDULE

S802 NO SCALE:

CONCRETE REINFORCING BAR LAP SPLICE SCHEDULE

BAR SIZE	f'c = 3000 PSI				f'c = 3500 PSI				f'c = 4000 PSI			
	REGULAR		TOP		REGULAR		TOP		REGULAR		TOP	
	CLASS		CLASS		CLASS		CLASS		CLASS		CLASS	
	A	B	A	B	A	B	A	B	A	B	A	B
#3	17"	22"	22"	28"	16"	21"	21"	26"	15"	19"	19"	25"
#4	22"	29"	29"	38"	21"	27"	27"	36"	19"	25"	25"	33"
#5	28"	36"	36"	47"	26"	34"	34"	44"	24"	31"	31"	41"
#6	33"	43"	43"	56"	31"	40"	40"	52"	29"	37"	37"	49"
#7	48"	63"	63"	81"	45"	59"	59"	75"	42"	54"	54"	71"
#8	55"	72"	72"	93"	51"	67"	67"	82"	48"	62"	62"	81"
#9	62"	81"	81"	105"	58"	75"	75"	98"	54"	70"	70"	91"
#10	70"	91"	91"	118"	65"	85"	85"	110"	61"	79"	79"	102"
#11	78"	101"	101"	131"	73"	94"	94"	122"	67"	87"	87"	114"

BAR SIZE	f'c = 4500 PSI				f'c = 5000 PSI				f'c = 6000 PSI			
	REGULAR		TOP		REGULAR		TOP		REGULAR		TOP	
	CLASS		CLASS		CLASS		CLASS		CLASS		CLASS	
	A	B	A	B	A	B	A	B	A	B	A	B
#3	14"	18"	18"	23"	13"	17"	17"	22"	12"	16"	16"	20"
#4	18"	24"	24"	31"	17"	23"	23"	29"	16"	21"	21"	27"
#5	23"	30"	30"	38"	22"	28"	28"	36"	20"	26"	26"	33"
#6	27"	35"	35"	46"	26"	34"	34"	44"	24"	31"	31"	40"
#7	40"	51"	51"	67"	38"	49"	49"	63"	34"	45"	45"	58"
#8	45"	59"	59"	76"	43"	56"	56"	72"	39"	51"	51"	66"
#9	51"	66"	66"	86"	48"	63"	63"	81"	44"	57"	57"	74"
#10	57"	74"	74"	96"	54"	71"	71"	92"	50"	64"	64"	84"
#11	64"	82"	82"	107"	60"	78"	78"	102"	55"	71"	71"	93"

NOTES:

1. THIS SCHEDULE SHALL BE USED FOR ALL SPLICES, UNLESS NOTED OTHERWISE.
2. HORIZONTAL BARS ARE CLASSIFIED AS TOP BARS WHERE 12", OR MORE, OF FRESH CONCRETE IS CAST BELOW THE REINFORCING BARS.
3. CLASS 'B' SPLICES SHALL BE USED FOR ALL SPLICES UNLESS NOTED OTHERWISE.
4. TIES AND STIRRUPS SHALL NOT BE SPLICED.
5. FOR ALL LIGHTWEIGHT CONCRETE, LAP LENGTHS SHALL BE MULTIPLIED BY 1.3.
6. FOR ALL EPOXY COATED BARS, LAP LENGTHS SHALL BE MULTIPLIED BY 1.5 FOR BARS WITH CLEAR COVER LESS THAN 3 BAR DIAMETERS OR CLEAR SPACING LESS THAN 6 BAR DIAMETERS, OTHERWISE MULTIPLY BY 1.2.
7. LAP LENGTHS SHALL BE MULTIPLIED BY 1.25 AT SHEARWALL BOUNDARY ELEMENTS.
8. DEVELOPMENT LENGTH 'Ld' IS EQUAL TO CLASS 'A' SPLICE.
9. IF REINFORCING HAS CLEAR COVER LESS THAN ONE BAR DIAMETER, LAP LENGTHS SHALL BE MULTIPLIED BY 1.5.
10. IF REINFORCING IS NOT ENCLOSED IN TIES OR STIRRUPS AND IS SPACED TIGHTER THAN 2 BAR DIAMETERS ON CENTER, LAP LENGTHS SHALL BE MULTIPLIED BY 1.5.
11. LAP LENGTHS SHALL BE MULTIPLIED BY 1.25 FOR GRADE 75 REBAR.
12. WHERE BARS OF DIFFERENT SIZES ARE LAPPED, THE SPLICE LENGTH SHALL BE THE LARGER OF 'Ld' OF THE LARGER BARS AND THE SPLICE LENGTH OF THE SMALLER BAR.

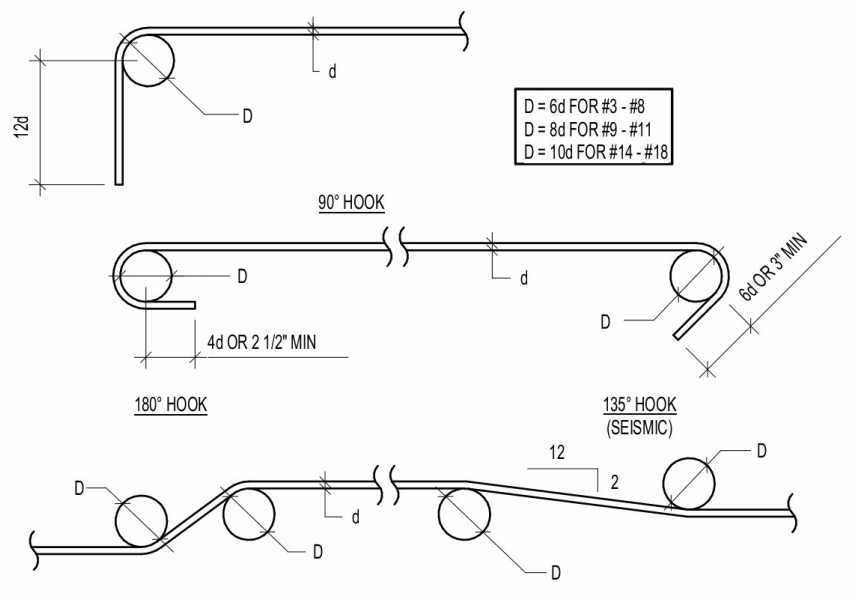

HOOKED BAR DEVELOPMENT LENGTHS, Ldh

BAR SIZE	f'c = 3000 PSI	f'c = 4000 PSI	f'c = 4500 PSI	f'c = 5000 PSI	f'c = 6000 PSI
#3	9"	8"	7"	7"	6"
#4	11"	10"	9"	9"	8"
#5	14"	12"	12"	11"	10"
#6	17"	15"	14"	13"	12"
#7	20"	17"	16"	15"	14"
#8	22"	19"	18"	17"	16"
#9	25"	22"	21"	20"	18"
#10	28"	25"	23"	22"	20"
#11	31"	27"	26"	24"	22"

NOTES:

1. FOR GRADE 75 REBAR, MULTIPLY LENGTHS BY 1.25.
2. FOR LIGHTWEIGHT CONCRETE, MULTIPLY LENGTHS BY 1.3.
3. FOR EPOXY COATED REINFORCEMENT, MULTIPLY LENGTHS BY 1.2.
4. FOR HOOKS WITH 2.5" MINIMUM SIDE COVER PERPENDICULAR TO PLANE OF HOOK, MULTIPLY LENGTHS BY 0.7.
5. FOR LATERAL LOAD RESISTING ELEMENTS, CRITICAL SECTIONS SHALL BE TAKEN AS THE FACE OF TIE / HOOP AT CONFINED CORES OF COLUMN JOINTS OR SHEAR WALL BOUNDARY ZONE.

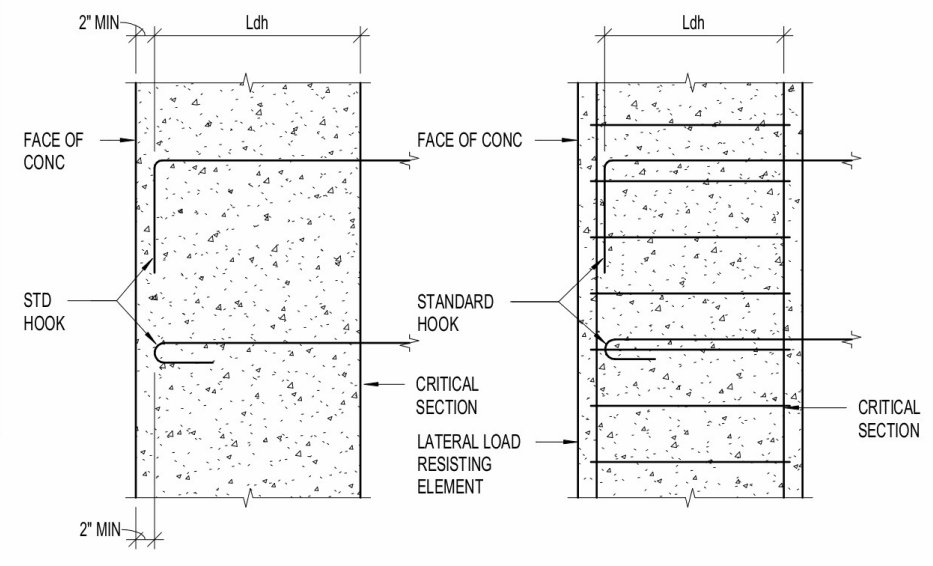

TYPICAL SECTION

SECTION AT LATERAL LOAD RESISTING ELEMENT

D

2 CONCRETE REINFORCING BAR LAP SCHEDULES AND DIAGRAMS

S802 NO SCALE:

CONCRETE PIER SCHEDULE

MARK	PIER SIZE	REINFORCING		TYPE	COMMENTS
		VERTICAL	TIES		
CP -1	18" x18"	(8) #6	(3) #4 AT 6"oc	A	

CONCRETE PIER NOTES:

1. INSTALL (3) SETS OF TIES WITHIN THE TOP 5" AT THE TOP OF ALL PIERS (UNO).
2. ALTERNATE POSITION OF HOOKS IN PLACING SUCCESSIVE SETS OF TIES.

C



TYPE "A"