


- Remove Roof Drain 4.0
- Remove Multipule Lay... 4.0
- Remove Flash... 8,212.5 SQ FT

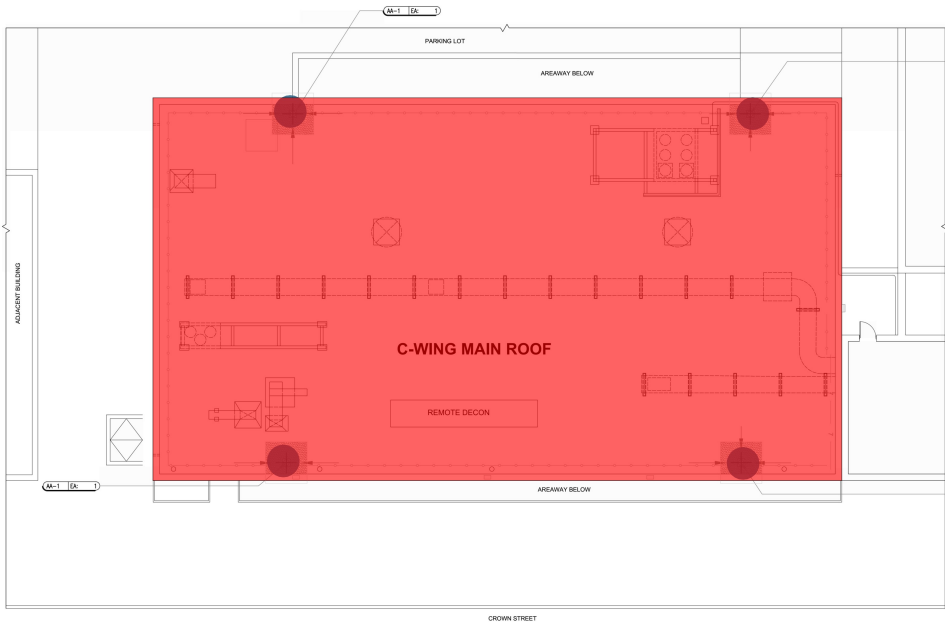

ROOF PLAN

- GENERAL NOTES**
- A. CONTRACTOR SHALL PERFORM ALL WORK IN STRICT ACCORDANCE WITH ALL APPLICABLE LOCAL, STATE, AND FEDERAL RULES, REGULATIONS, GUIDELINES, AND THE CONTRACT DOCUMENTS.
 - B. ALL MATERIAL MEASUREMENTS AND/OR QUANTITIES AND LOCATIONS ARE APPROXIMATE AND FOR GENERAL ORIENTATION ONLY. REFER TO DETAIL LISTS FOR APPROXIMATE QUANTITIES AND ABATEMENT PROCEDURES. ALL MATERIAL MEASUREMENTS AND/OR QUANTITIES AND LOCATIONS ARE APPROXIMATE. CONTRACTOR SHALL VERIFY IN THE FIELD.
 - C. THE PROVISIONS OF ANY SITE-SPECIFIC VARIANCE OBTAINED BY THE CONTRACTOR MAY NOT BE IMPLEMENTED UNTIL APPROVAL IS GIVEN BY DASNY OR THEIR REPRESENTATIVE.
 - D. THE LOCATION OF ANY SITE STORAGE OF MATERIAL, EQUIPMENT, AND WASTE TRAILER/DUMPSTER SHALL BE COORDINATED WITH AND APPROVED BY DASNY OR THEIR REPRESENTATIVE.
 - E. CONTRACTOR IS RESPONSIBLE FOR ALL TOOLS, EQUIPMENT, AND SUPPLIES. DASNY OR THEIR REPRESENTATIVE WILL NOT BE RESPONSIBLE FOR LOST OR STOLEN ITEMS.
 - F. CONTRACTOR IS RESPONSIBLE FOR KEEPING THE WORK AREA IN A CLEAN AND SAFE CONDITION. CONTRACTOR SHALL ENSURE THAT UNIDENTIFIED PERSONNEL OR UNAUTHORIZED VISITORS DO NOT ENTER ACTIVE WORK AREAS AT ANY TIME.
 - G. THE CONTRACTOR SHALL PROVIDE ALL SCAFFOLDING, LIFTS, ETC. REQUIRED TO REMOVE ALL MATERIALS.
 - H. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING TEMPORARY PROTECTION TO KEEP THE BUILDING IN A TERTIARY CONDITION AND TO PREVENT UNAUTHORIZED ACCESS AT ALL TIMES DURING THE DURATION OF THE PROJECT. REPAIR OF DAMAGE CAUSED AS A RESULT OF IMPROPER TEMPORARY PROTECTION WILL BE THE RESPONSIBILITY OF THE CONTRACTOR.
 - I. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DEMOLITION REQUIRED TO ACCESS AND ABATE MATERIALS SCHEDULED FOR REMOVAL.
 - J. ALL ASBESTOS-CONTAINING MATERIAL SHALL BE PROPERLY PACKAGED PRIOR TO BEING REMOVED FROM THE WORK AREAS. GENERATOR LABELS SHALL BE APPLIED TO THE ASBESTOS WASTE BAGS. ALL ASBESTOS MATERIALS THAT ARE REMOVED FROM THE WORK AREAS SHALL BE ACCOMPANIED BY A WASTE SHIPMENT RECORD. COMPLETED WASTE SHIPMENT RECORDS MUST BE PROVIDED TO DASNY AS PART OF THE CLOSURE DOCUMENTATION. ALL ORIGINAL WASTE SHIPMENT RECORDS MUST BE PROVIDED WITHIN 35 DAYS OF THE WASTE LEAVING THE SITE.
 - K. THE THIRD PARTY ON-SITE MONITOR SHALL SORT ALL HAZARDOUS WASTE AND NON-HAZARDOUS WASTE MANIFESTS, SHIPPING PAPERS, BILLS OF LADING AND OTHER WASTE SHIPMENT RECORDS. CONTRACTOR SHALL PROVIDE ALL COMBUSTIBLES WITH ALL RECORDS COMPLETE, FILLED IN AND READY TO BE SIGNED A MINIMUM OF 48 HOURS PRIOR TO SCHEDULED REMOVAL FROM THE SITE.
 - L. THE DISTURBANCE OF ANY ASBESTOS-CONTAINING MATERIAL OR SUSPECT MATERIAL SHALL BE PERFORMED BY A LICENSED ASBESTOS ABATEMENT CONTRACTOR.
 - M. IF ANY ASBESTOS AND/OR SUSPECT MATERIAL IS IDENTIFIED AND/OR DISTURBED DURING CONSTRUCTION, ALL OPERATIONS SHALL CEASE AND DASNY OR THEIR REPRESENTATIVE SHALL BE NOTIFIED FOR FURTHER DIRECTION. UNDER NO CIRCUMSTANCES SHALL THE CONTRACTOR COLLECT AND/OR ANALYZE Bulk Samples OF SUSPECT MATERIALS WITHOUT THE APPROVAL OF DASNY OR THEIR REPRESENTATIVE.
 - N. THE BUILDING IS A COLLEGE FACILITY. THE ABATEMENT CONTRACTOR IS TO COORDINATE PACKING, ACCESS AND MAINTENANCE ACTIVITIES. THE DASNY AND FACILITY STAFF TO ALLOW FOR NORMAL BUILDING OPERATIONS TO CONTINUE AND NOT BE ADVERSELY AFFECTED BY THE WORK WHILE COMPLYING WITH REQUIREMENTS OF ICR 86.
- ASBESTOS ABATEMENT NOTES**
- 1. CONTRACTOR SHALL REMOVE AND PROPERLY DISPOSE OF THE ASBESTOS-CONTAINING FLASHING AROUND THE ROOF DRAINS AS INDICATED. THERE ARE MULTIPLE LAYERS OF FLASHING. ALL ROOFING MATERIALS, TARS, MASTICS, ETC. SHALL BE REMOVED COMPLETELY TO THE SUBSTRATE. DISPOSE OF ALL ROOFING MATERIAL AS RACK.
- MOLD AWARENESS NOTE**
- 1. ALL CONTRACTORS AND SUBCONTRACTORS SHALL NOTIFY DASNY IMMEDIATELY IF SUSPECT MOLD GROWTH IS DISCOVERED ON SURFACES TO BE DISTURBED DURING THE PROJECT. NO DISTURBANCE TO THESE SURFACES SHALL OCCUR UNTIL DASNY ADDRESSES THE SITUATION AND DETERMINES THE PROPER COURSE OF ACTION TO TAKE.
- LEAD AWARENESS NOTES**
- 1. CONTRACTOR SHALL BE RESPONSIBLE FOR COMPLYING WITH OSHA 29 CFR 1926.62. LEAD EXPOSURE IN CONSTRUCTION. BEFORE FINAL RUL FOR ALL ACTIVITIES DURING WHICH AN EMPLOYEE MAY BE OCCUPATIONALLY EXPOSED TO LEAD. ALL CONTRACTORS SHALL ENSURE THAT THEIR EMPLOYEES WEAR PROPER PERSONAL PROTECTIVE EQUIPMENT AND/OR UTILIZE APPROPRIATE WORK METHODS TO PREVENT ELEVATED BLOOD LEAD LEVELS OR EXPOSURE ABOVE THE PERMISSIBLE EXPOSURE LIMIT.
- ROOF APPROVAL STAMPS**

-

UNIT PRICE ITEMS	
Unit Price	
CCN 01 SF:	20
Unit Price	
FLA 04 LF:	18
Applies to flashing of the main roof	
Unit Price	
PMT 01 LF:	150
Unit Price	
MSC 01 LF:	100
Unit Price	
MSC 02 LF:	140

NOTE: CONTRACTOR IS RESPONSIBLE FOR TEMPORARILY DISCONNECTING, RELOCATING, AND RECONNECTING OF ANY EXISTING ROOF TOP EQUIPMENT PIPING AND CONDUITS AS REQUIRED TO ACCOMMODATE NEW ROOFING SYSTEM.

- ▼ INDICATES ENTRYWAY
- ⊕ INDICATES EXISTING ROOF DRAIN TO REMAIN
- INDICATES SLOPE OF ROOF TOWARD DRAINS
- INDICATES EXTENT OF "NEW 01"
- INDICATES EXISTING CONCRETE CURB TO REMAIN
- ⊞ INDICATES EXISTING VENTILATOR FAN TO REMAIN
- ⊞ INDICATES EXISTING HVAC EQUIPMENT TO REMAIN
- INDICATES EXISTING STEEL LADDER TO REMAIN
- INDICATES EXISTING PIPE PENETRATION TO REMAIN
- INDICATES APPROXIMATE LOCATION OF COPPER PIPE TO BE INSULATED
- FREE-STANDING RAILING SYSTEM
- 1 INDICATES EXTENT OF FLA 01
- 7 INDICATES EXTENT OF FLA 07

ID	RESTORATION ITEM	DWG
CEN 02	CONCRETE DECK REPAIR	A-501
CEN 03	DEMOLITION/REMOVE BUTTERFLY ROOF	A-501
DEN 01	ROOF DRUM REINFORCEMENT	A-502
FLN 01	ROOF PERIMETER FLASHING AT CHIMNEY WALL	A-503
FLN 02	ROOF CURB FLASHING AT PERIMETER, ELECTRICAL	A-503
FLN 03	ROOF CURB FLASHING AT MECHANICAL UNITS	A-503
FLN 04	ROOF FLASHING AT MECHANICAL UNITS	A-504
FLN 05	FLASHING AT COND. PAN. - COND. PAN.	A-504
FLN 06	ROOF FLASHING AT PITCH POCKET	A-504
FLN 07	EXPANSION JOINT AT CHIMNEY EAST WALL	A-504
FLN 08	FLASHING AT PISC. PENETRATOR	A-504
FLN 09	FLASHING AT STEEL BEAM	A-506
FLN 10	FLASHING AT ELECTRICAL CONDUIT	A-506
FLN 11	CHIMNEY METAL FLASHING	A-506
MEM 01	ROOF SYSTEM - SEE MODIFIED BUTTERFLY MEMBRANE OVER	A-507
MSG 01	COPPER PIPE INSULATION	A-507
MSG 02	COPPER PIPE INSULATION REPAIR	A-507
INT 01	DEEP PENETRATION AT STONE CORNER	A-508
RW 01	FREE-STANDING RAILING SYSTEM	A-508

- CONTRACTOR SHALL REMOVE & DISPOSE OF ALL EXISTING DOWNSPouts, WOOD BOLE VAPOR RETARDANTS, INSULATION, FLASHING & RELATED MATERIALS DOWN TO THE CONCRETE METAL DECK (EXCEPT WHERE INDICATED TO REMAIN IN THE ASSOCIATED RESTORATION ASSEMBLY DETAIL).
- CONTRACTOR SHALL REMOVE & DISPOSE OF ALL EXISTING PITCH POCKETS AND REL ACCESSORIES.
- CONTRACTOR SHALL REMOVE EXISTING BASE FLASHING TO HEIGHT OF NEW FLASHING SHOWN "RESTORATION ASSEMBLY DETAIL".
- COORDINATE WITH ALL TRADES TO ENSURE ROOF SYSTEM REMAINS TIGHT THROUGHOUT CONSTRUCTION.
- EXISTING DRAIN, GUTS, SUPPORTS, PIPES AND VENTILATORS TO BE MADE WATERPROOF IN EXISTING CONFIGURATION AFTER ROOFING DEMOLITION. (SEE ROOF PLAN FOR LOCATIONS AND DETAILS FOR EACH DRAIN, GUT, SUPPORT, PIPE OR VENTILATOR).
- CONTRACTOR SHALL PROTECT EXISTING MECHANICAL EQUIPMENT DURING DEMOLITION EXISTING ROOFING & INSTALLATION OF NEW ROOFING.
- ALL EXISTING ROOFTOP ELECTRICAL, EQUIPMENT/CONDENSATE INTERFERING WITH INSTALLATION 1. BE TEMPORARILY DISCONNECTED AND RECONNECTED UPON COMPLETION OF WORK BY A LICENSED ELECTRICIAN.

* TEMPORARILY DISCONNECT EXISTING CONDENSERS AND PIPES AS REQUIRED TO INSTALL NEW #1 FLASHING; RECONNECT AFTER NEW ROOF FLASHING IS IN PLACE. REMOVE #1 FLASHING WHEN IT CAN BE DONE BY ITS LICENSED PLUMBER/ELECTRICIAN AND COORDINATED WITH FIRM (TYP.)

* PROVIDE NEW CONDENSER/PIPING SUPPORTS PROVIDED BY ROOFING SYSTEM MANUFACTURER

* ALL COSTS RELATED TO DISCONNECTING, RESETTling, REPLACING BURNER AND RECONNECTION OF GAS LINES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. SEE PAGE 80.

* ALL CONTRACTORS SHALL NOTE THAT THE FOLLOWING BUILDING MATERIALS CONTAIN DETECTABLE TRACE LEVELS OF ARSENIC AND CHROMIUM WHICH ARE NOT TO BE USED IN ANY MANNER:

1. BOTTOM LAYER OF ROOF FLASHING AT PERIMETER OF ROOF NEAR THE SOUTH PARAPET.

2. BOTTOM LAYER OF ROOF FLASHING AT PERIMETER OF ROOF NEAR SOUTHWEST CORNER OF PARAPET.


CONTRACTOR SHALL FOLLOW ALL FEDERAL REGULATIONS, INCLUDING THOSE ESTABLISHED BY THE WORK AREA AGENCY.

JOB-SPECIFIC STAMPS

FOR ADDITIONAL STAMPS

ROOF PLAN



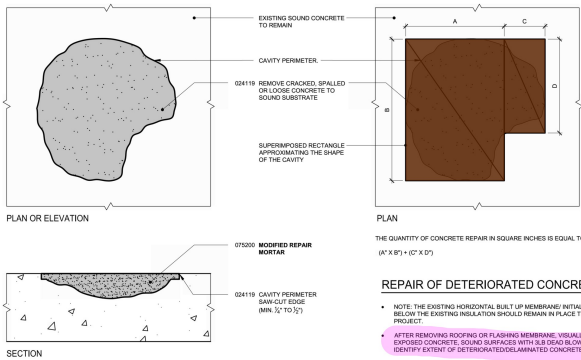


REPAIR OF DETERIORATED CONCRETE

- NOTE: THE EXISTING HORIZONTAL BUILT UP MEMBRANE INITIAL VAPOR BARRIER BELOW THE EXISTING INSULATION SHOULD REMAIN IN PLACE THROUGHOUT THE PROJECT.
- AFTER REMOVING ROOFING OR FLASHING MEMBRANE VISUALLY SURVEY ANY EXPOSED CONCRETE. SOUND SURFACES WITH SLB DEAD BLOW HAMMER TO DETERMINE EXTENT OF DETERIORATED/DELAMINATED CONCRETE TO BE REMOVED.
- MARK AREA OF DETERIORATED/DELAMINATED CONCRETE.
- CREATE A CAVITY BY REMOVING ALL LOOSE MATERIAL (PHOTOGRAPHICALLY DOCUMENT LOCATION OF DETERIORATED AREAS BEFORE REPAIRING).
- DETERMINE QUANTITY OF CONCRETE REPAIR IN ACCORDANCE WITH QUANTIFICATION PROCEDURE DIAGRAM.
- PREPARE CAVITY SURFACE AND APPLY MODIFIED REPAIR MORTAR AS RECOMMENDED BY MANUFACTURER'S INSTRUCTIONS.


QUANTIFICATION PROCEDURE

- AT EACH CAVITY LOCATION, THE QUANTITY OF CONCRETE REPAIR EQUALS THE SUM OF THE AREAS OF THE SUPERIMPOSED RECTANGLES THAT APPROXIMATE THE SHAPE OF THE CAVITY.
- THE LIMIT OF MEASURE FOR THE QUANTIFICATION OF CONCRETE REPAIR IS SQUARE FEET (SQ FT).



0'6"

CON 01 CONCRETE DECK REPAIR (SF)

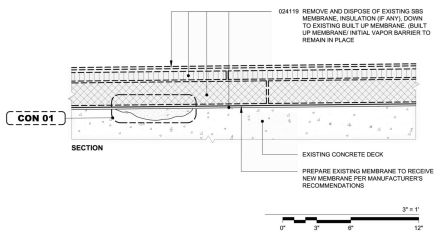

DEM 01 CONCRETE DECK REPAIR (SF)

DATE APPROVAL STAMPS

